



**HAIN-YO ENTERPRISES CO., LTD.**

[www.ceramiccartridge-tw.com](http://www.ceramiccartridge-tw.com)

TEL: 886-4-7574837

E-mail: [hainyo-3@hainyo.com.tw](mailto:hainyo-3@hainyo.com.tw), [hainyo@ms24.hinet.net](mailto:hainyo@ms24.hinet.net)

FAX: 886-4-7574817

No. 102, Tien-Tung Rd., Ho-Mei, Changhua, Taiwan, R.O.C.




**KTW**




Smart operation way | Dual control cartridge | Simple shape design


# Diverter Pressure Balance Cartridge

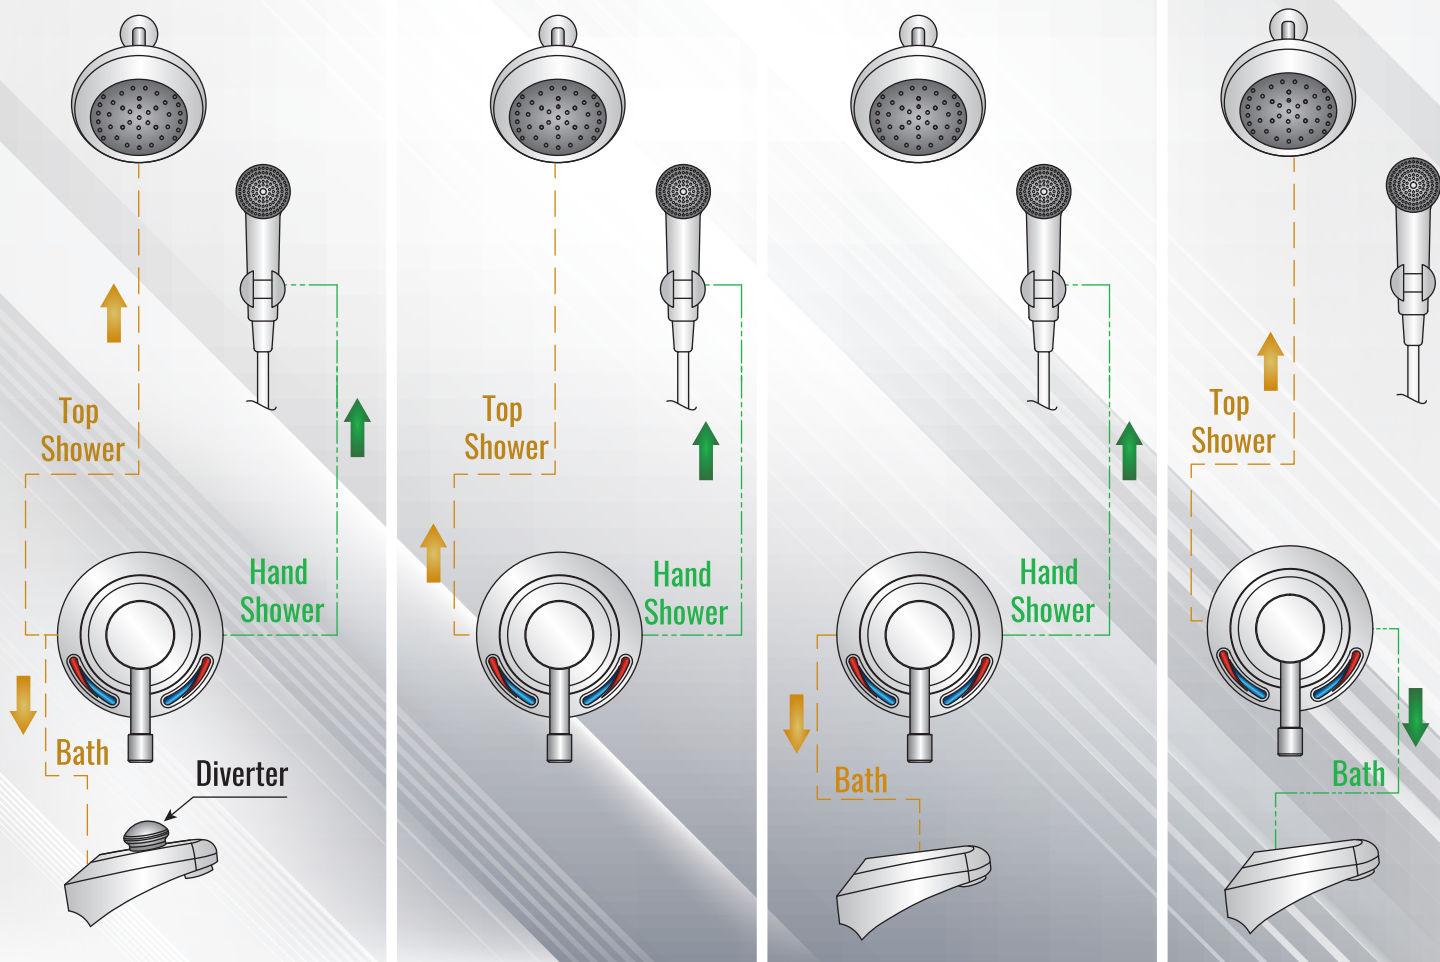

**Normal**

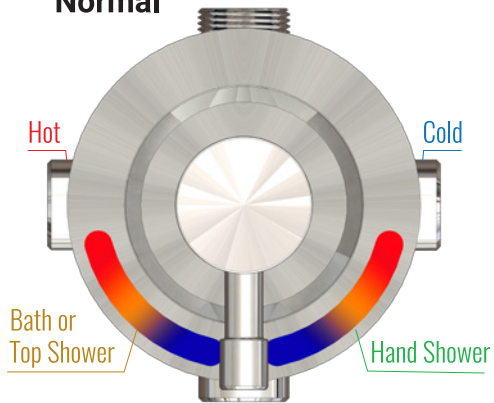

**Back to Back**

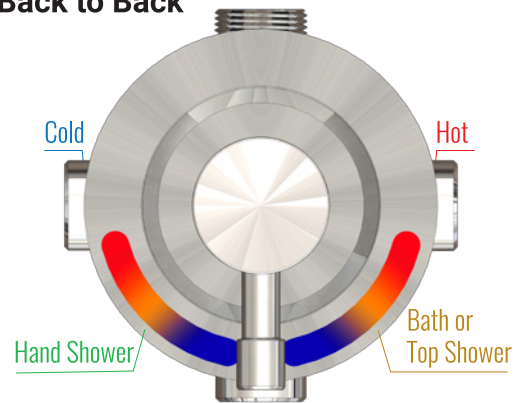

# Diverter Pressure Balance Cartridge

**Model No.** JL02BD

Material AL<sub>2</sub>O<sub>3</sub> 92-96%

Surface Roughness Ra0.1~Ra0.3 μm

Hardness ≥1000 HV

Flatness <0.6 μM

Nut Lock Torque 10~12 N.m

Recommended Temp. 3.9 °C~82 °C  
(39 °F~180°F)

Pressure Resistance (Max.) 500 PSI

Flow Rate (no resistance) 20.6 L/min  
at 3 bar

